





พานิชมิเตอร์แบบอนาล็อก Analog Panel Meter SD Series 96x96 mm.

SD-96 Series
Moving Iron Type




CONNECTION DIAGRAM

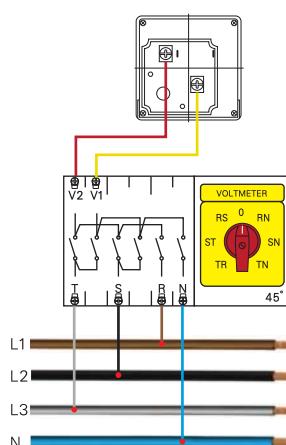


SD-96V



CONNECTION DIAGRAM



SD-96A

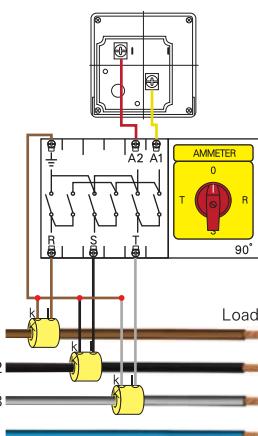

SD-96A

Specifications

Reference standard	: EN/IEC 60051
Case-dimensions	: DIN 43700
Scales and pointer	: DIN 43802
Magnetic influence	: DIN 43780
Safety	: IEC 1010-1
Housing	: Self-extinguishing polymer ABS according to UL94V-0
Protection for housing	: IP40 as standard
Protection for terminals	: IP00 without back cover IP20 with back cover
Accuracy class	: 1.5, 2.5
Operating frequency	: 45~65Hz
Dielectric test voltage	: 2KV/ 50Hz/ 1minute
Overload AC voltage	: x1.2 continuous(x2 for 5 seconds)
AC Current	: x1.2 continuous(x10 for 5 seconds)

Power consumption

Voltage	: 1.8VA for 250V, 3.3VA for 500V
Current	: 0.7VA for 1A, 1.2VA for 5A
Reference temperature	: 23°C ± 2°C
Operating temperature	: -25°C to 40°C
Storage temperature	: -40°C to 70°C
Relative humidity	: ≤85%

โวลต์มิเตอร์ (Voltmeter)

~1.5


รุ่น (Model)	Connection	Measuring Range	ราคา (บาท)
SD-96V	Line/Neutral Line/Line	0-300V 0-500V	360.-

แอมป์มิเตอร์ (Ammeter)

~1.5, 2.5

รุ่น (Model)	Connection	Measuring Range	ราคา (บาท)
SD-96A	Direct Connect (ต่อตรง)	5A 10A 15A	320.-
		20A 30A 50A	
		60A 100A	
SD-96A	Through current transformers (5A)	5/5A 10/5A 15/5A	320.-
		20/5A 30/5A 40/5A	
		50/5A 60/5A 80/5A	
		100/5A 125/5A 150/5A	
		160/5A 200/5A 250/5A	
		300/5A 400/5A 500/5A	
		600/5A 800/5A 1000/5A	
		1200/5A 1250/5A 1500/5A	
		1600/5A 2000/5A 2500/5A	
		3000/5A 4000/5A 5000/5A	

DIMENSION

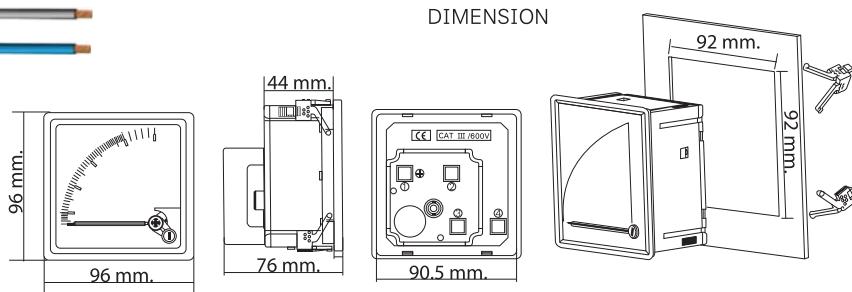

* ราคานี้ไม่รวมภาษีมูลค่าเพิ่มและราคาก็อาจเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า *