




current: 16A | 32A
voltage: 400V~3P+N+E
IP44 splash proof




MODEL	HT315	HT325	
earth contact position	6h		
rated current (A)	16	32	
pole	5		
dimension (mm)	a b c d e f g	76 86 60 61 47 37 72	81 96 60 70 42 47 81
cable nominal cross- section area (mm ²)	1.5~4	2.5~10	
Price	170.-	230.-	

FLANGED SOCKET

เต้ารับเบเยอร์บันฝัง



German style
current: 16A
voltage: 230V~2P+E
IP44 splash proof




MODEL	DKN312	
rated current (A)	16A	
pole	3	
dimension (mm)	a b c d e f g	50.5 38 62 25 17 27.5 43.5
cable nominal cross- section area (mm ²)	1.2~5	
Price	100.-	

PLUG

ปลั๊กตัวผู้เบเยอร์บัน



German style
current: 16A
voltage: 230V~2P+E
IP44 splash proof




MODEL	DKN012	
rated current (A)	16A	
pole	3	
dimension (mm)	a b c d	117 41.5 10 6
cable nominal cross- section area (mm ²)	1.2~5	
Price	90.-	


HTN SERIES IP44

PLUGS

ปลั๊กตัวผู้

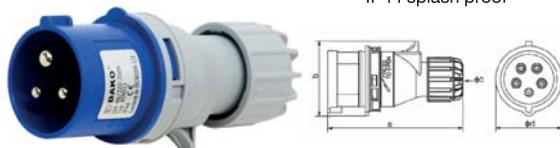


current: 16A | 32A
voltage: 230V~2P+E
IP44 splash proof



MODEL	HTN013	HTN023	
earth contact position	6h		
rated current (A)	16	32	
pole	3		
dimension (mm)	a b c d	120 57 15 53.5	150 80.5 22 72
cable nominal cross- section area (mm ²)	1~2.5	2.5~6	
Price	125.-	220.-	




current: 16A | 32A
voltage: 400V~3P+E
IP44 splash proof



MODEL		HTN014	HTN024
earth contact position		6h	
rated current (A)		16	32
pole		4	
dimension (mm)	a	125	150
	b	67.5	80.5
	c	15	22
	d	61	72
cable nominal cross- section area (mm ²)		1~2.5	2.5~6
Price		155.-	240.-



current: 16A | 32A
voltage: 400V~3P+N+E
IP44 splash proof




MODEL		HTN015	HTN025
earth contact position		6h	
rated current (A)		16	32
pole		5	
dimension (mm)	a	133	155
	b	75.5	89.5
	c	17	22
	d	68	71.5
cable nominal cross- section area (mm ²)		1~2.5	2.5~6
Price		180.-	270.-

CONNECTORS

เต้ารับกลางทาง



current: 16A | 32A
voltage: 230V~2P+E
IP44 splash proof



MODEL		HTN213	HTN223
earth contact position		6h	
rated current (A)		16	32
pole		3	
dimension (mm)	a	130	162
	b	75.6	94
	c	15	22
	d	52	64.6
cable nominal cross- section area (mm ²)		1~2.5	2.5~6
Price		175.-	280.-




current: 16A | 32A
voltage: 400V~3P+E
IP44 splash proof



MODEL		HTN214	HTN224
earth contact position		6h	
rated current (A)		16	32
pole		4	
dimension (mm)	a	135	162
	b	83	94
	c	15	22
	d	58	64.6
cable nominal cross- section area (mm ²)		1~2.5	2.5~6
Price		200.-	300.-



current: 16A | 32A
voltage: 400V~3P+N+E
IP44 splash proof



MODEL		HTN215	HTN225
earth contact position		6h	
rated current (A)		16	32
pole		5	
dimension (mm)	a	142	163.5
	b	89.5	100
	c	17	22
	d	62.8	71
cable nominal cross- section area (mm ²)		1~2.5	2.5~6
Price		230.-	350.-


* ราคาข้างต้นอาจเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า
Prices are subjected to change without prior notice

WALL SOCKETS


เต้ารับติดลอย




current: 16A | 32A
voltage: 230V~2P+E
IP44 splash proof



current: 16A | 32A
voltage: 400V~3P+E
IP44 splash proof



current: 16A | 32A
voltage: 400V~3P+N+E
IP44 splash proof



MODEL		HTB113	HTB123
earth contact position		6h	
rated current (A)		16	32
pole		3	
	a	117	120
	b	142	156
dimension (mm)	c	84.4	84.4
	d	60	60
	e	52	52
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		250.-	320.-

MODEL		HTB114	HTB124
earth contact position		6h	
rated current (A)		16	32
pole		4	
	a	117	120
	b	142.5	156
dimension (mm)	c	84.4	84.4
	d	60	60
	e	52	52
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		280.-	350.-


MODEL		HTB115	HTB125
earth contact position		6h	
rated current (A)		16	32
pole		5	
	a	118.5	119
	b	142.5	158
dimension (mm)	c	84.4	84.4
	d	60	60
	e	52	52
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		310.-	400.-

FLANGED SOCKETS

เต้ารับฝังเดี่ยง




current: 16A | 32A
voltage: 230V~2P+E
IP44 splash proof



MODEL		HTN313	HTN323
earth contact position		6h	
rated current (A)		16	32
pole		3	
	a	75.5	75.5
	b	86.5	86.5
dimension (mm)	c	61	61
	d	61	61
	e	36	55
	f	37	42
	g	57.5	64
	h	-	35
	i	-	38
	R	-	32
	r	-	7
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		160.-	240.-




current: 16A | 32A
 voltage: 400V~3P+E
 IP44 splash proof



MODEL		HTN314	HTN324
earth contact position		6h	
rated current (A)		16	32
pole		4	
	a	75.5	75.5
	b	86.5	86.5
	c	61	61
	d	61	61
	e	40	55
	f	40	42
	g	64	64
	h	35	35
	i	38	38
	R	32	32
	r	7	7
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		180.-	270.-



current: 16A | 32A
 voltage: 400V~3P+N+E
 IP44 splash proof




MODEL		HTN315	HTN325
earth contact position		6h	
rated current (A)		16	32
pole		5	
	a	75.5	80
	b	86.5	90
	c	61	65
	d	61	70
	e	40	51
	f	41	45
	g	64	70
	h	35	37.5
	i	38	40.5
	R	32	35
	r	7	7
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		240.-	300.-

FLANGED SOCKETS

เต้ารับฝังตรง




current: 16A | 32A
 voltage: 230V~2P+E
 IP44 splash proof



MODEL		HTN413	HTN423
earth contact position		6h	
rated current (A)		16	32
pole		3	
	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	25.8	29.2
	f	52	62.5
	g	85	93
	h	43	57.5
cable nominal cross- section area (mm ²)		1.5~4	2.5~10
Price		160.-	240.-




current: 16A | 32A
voltage: 400V~3P+E
IP44 splash proof



MODEL	HTN414	HTN424	
earth contact position	6h		
rated current (A)	16	32	
pole	4		
dimension (mm)	a b c d e f g h	75 75 60 60 26.3 51.5 86.5 49.5	75 75 60 60 29.4 51.5 86.5 57.5
cable nominal cross- section area (mm ²)	1.5~4	2.5~10	
Price	180.-	270.-	



current: 16A | 32A
voltage: 400V~3P+N+E
IP44 splash proof




MODEL	HTN415	HTN425	
earth contact position	6h		
rated current (A)	16	32	
pole	5		
dimension (mm)	a b c d e f g h	75 75 60 60 26.2 52 91.6 56	75 75 60 60 29.8 62.5 100 64
cable nominal cross- section area (mm ²)	1.5~4	2.5~10	
Price	240.-	300.-	

FLANGED INLETS

ปลั๊กตัวผู้ฝัง




current: 16A | 32A
voltage: 230V~2P+E
IP44 splash proof



MODEL	HTN613	HTN623	
earth contact position	6h		
rated current (A)	16	32	
pole	3		
dimension (mm)	a b c d	45.5 16.5 64 4.5	54.7 17 64 4.5
cable nominal cross- section area (mm ²)	1~4	2.5~10	
Price	370.-	470.-	



current: 16A | 32A
voltage: 400V~3P+E
IP44 splash proof



MODEL	HTN614	HTN624	
earth contact position	6h		
rated current (A)	16	32	
pole	4		
dimension (mm)	a b c d	45.5 16.5 64 4.5	55 16.5 64 4.5
cable nominal cross- section area (mm ²)	1~4	2.5~10	
Price	400.-	490.-	