





SD-50V


#### CONNECTION DIAGRAMS



SD-60V




SD-80V




SD-50A


#### CONNECTION DIAGRAMS



SD-60A



SD-80A




SD-80FP 45...55Hz



SD-80FP 45...65Hz

#### CONNECTION DIAGRAMS



SD-50 Series  
SD-60 Series  
SD-80 Series  
Moving Iron Type

#### SPECIFICATIONS

- Accuracy Class : 2.5
- Rated Voltage : 600Vac
- Rated Temperature : -25 °C to 40 °C
- Insulation Test : 2KV, 50Hz, 1min

### โวลท์มิเตอร์ (VoltMeter) ~ 2.5

รุ่น (Model)	Connection	Measuring Range		ราคา (บาท)
SD-50V	Line/Neutral	0-300V	0-500V	170.-
SD-60V		0-300V	0-500V	190.-
SD-80V		0-300V	0-500V	200.-

### แอมป์มิเตอร์ (Ammeter) ~ 2.5


รุ่น (Model)	Connection	Measuring Range				ราคา (บาท)
SD-50A	Direct Connection (ต่อตรง)	5A	10A	15A	20A	170.-
		30A	40A	50A	60A	
SD-60A	Direct Connection (ต่อตรง)	5A	10A	15A	20A	190.-
		30A	40A	50A	60A	
SD-80A	Direct Connection (ต่อตรง)	5A	10A	15A	20A	200.-
		30A	40A	50A	60A	
SD-80A	Through current transformers (5A)	5/5A	10/5A	15/5A	20/5A	200.-
		30/5A	40/5A	50/5A	60/5A	
		80/5A	100/5A	150/5A	200/5A	
		250/5A	300/5A	400/5A	500/5A	
		600/5A	800/5A	1000/5A		



SD-80 Series  
Moving Coil Type

### มิเตอร์วัดความถี่ (Frequency Meter) ~ 2.5

รุ่น (Model)	Connection Input Voltage	Measuring Range		ราคา (บาท)
SD-80FP	220V	45...55 Hz	45...65 Hz	650.-

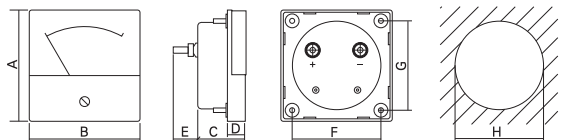

Model	Dimension (mm.)						
	A	B	C	D	E	F	H
SD-50	50	50	32.3	10	13	38	47
SD-60	60	60	33.3	12	13	48	53
SD-80	80	80	35.3	13	13	65	66

\* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและราคาอาจเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า \*